



MIAMI BEACH

OFFICE OF THE CITY MANAGER

NO. LTC # 106-2015

LETTER TO COMMISSION

TO: Mayor Philip Levine and Members of the City Commission

FROM: Jimmy L. Morales, City Manager

DATE: March 11, 2015

SUBJECT: **WEST AVENUE NEIGHBORHOOD IMPROVEMENT PROJECT PHASE 1**

The purpose of this Letter to Commission is to provide information regarding the West Avenue Improvement Project Phase I. Permits were received yesterday, March 10, 2015 and work has begun today March 11, 2015 to establish the work zone on 17th Street between Dade Boulevard and on Alton Road and West Avenue between Lincoln Road and 17th Street.

A Project Fact Sheet was developed and distributed to the West Avenue data base Friday, February 27, 2015 and is attached. A Planned Progress Update is also attached to this LTC. The MOT is a phased approach. Phase I of the MOT has been completed and Phase II of the MOT is now being implemented. Meetings with property owners and representatives have been taking place over several weeks. The West Avenue Neighborhood Association has been notified and has assisted in the distribution of information. The project Public Information Officer is communicating the updates.

For further information please contact Eric Carpenter, City of Miami Beach, Public Works Director, 305-673-7080.

MT/ETC/LWB

RECEIVED
2015 MAR 12 AM 10:27
CITY CLERK'S OFFICE

FACTS

PlannedProgress

MIAMI BEACH

West Avenue

Neighborhood Improvement Project Phase One

Project Overview and Benefits

The City of Miami Beach Public Works Department is constructing the West Avenue Neighborhood Improvement Project to install pump stations and raise the elevation of the roadway to minimize street flooding. The City has contracted Bergeron Land Development to perform the work. Construction is under way in the following areas:

- 17 Street between Alton Road and West Avenue
- West Avenue between Lincoln Road and 17 Street
- 14 Street and 10 Street between Alton Road and the Bay
- West Avenue between 5 Street and 8 Street
- 6 Street between Alton Road and West Avenue

Scope of Work

Infrastructure Improvements:

- Installing a new storm water drainage system, including pump stations at 17 Street and 6 Street
- New pump stations at 10 Street and 14 Street are already in service
- Upsizing sections of the existing storm water drainage system
- Installing a new sanitary sewer main
- Installing a new water main and service lines

Roadway Improvements:



- Elevating the roadway
- Constructing new curb, gutter and sidewalks
- Installing new signage and pavement markings
- Installing new street lighting and performing minor signalization work
- Matching the new roadway elevation to existing driveways

Access to properties will be maintained at all times. On-street parking will be temporarily eliminated during the work.

Timeline

The first phase of construction in the above areas is anticipated to be completed by the end of 2015. Please note this schedule may change due to weather or unforeseen circumstances.

To request this material in alternate format, sign language interpreter (five-day notice required), information on access for persons with disabilities, and/or any accommodation to review any document or participate in any city-sponsored proceedings, call 305.604.2489 and select 1 for English or 2 for Spanish, then option 6; TTY users may call via 711 (Florida Relay Service).

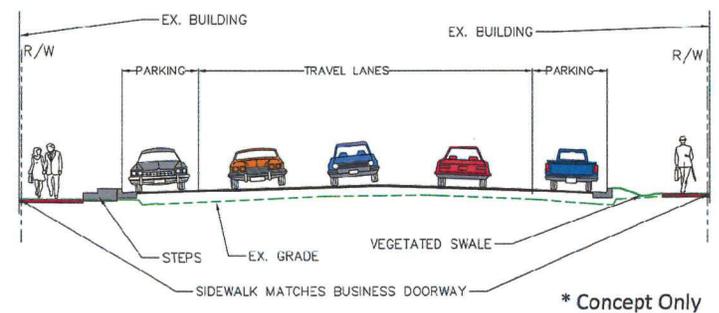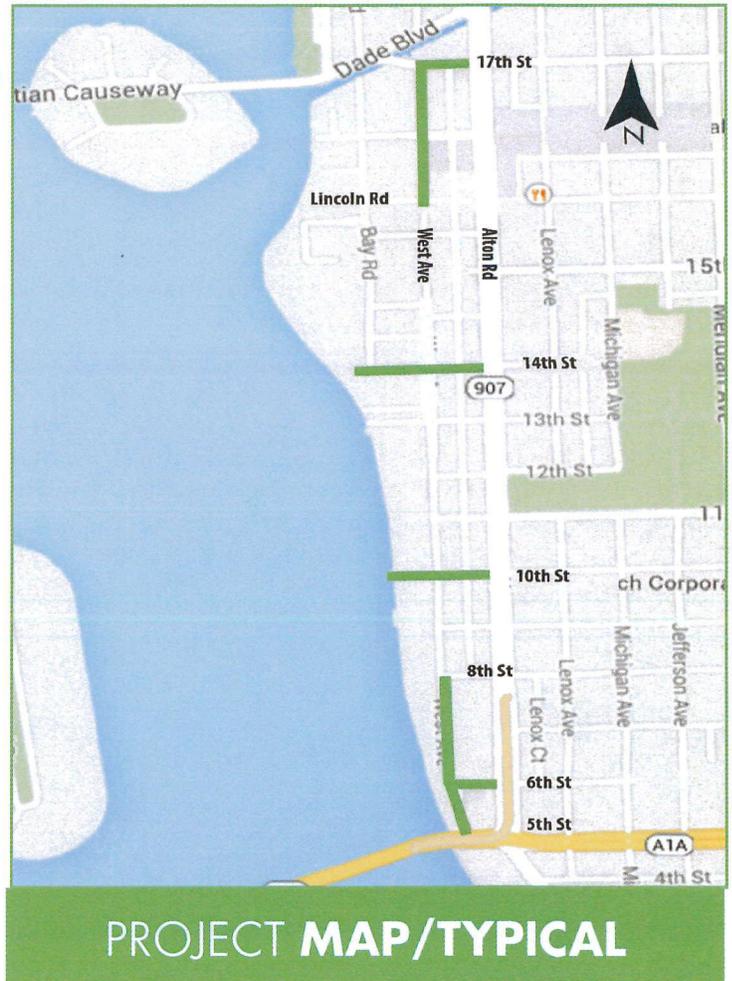

Communication

For more information, please contact:
 Heather M. Leslie, Public Information Officer
 P: 305.905.5876 E: heather@hmlpublicoutreach.com

DATOS

Planned Progress

MIAMI BEACH

West Avenue

Primera Fase del Proyecto de Mejoras al Vecindario

Resumen y Beneficios del Proyecto

El Departamento de Obras Públicas de la Ciudad de Miami Beach está construyendo las mejoras en el vecindario de West Avenue para instalar dos estaciones de bombeo y para elevar la altura de la calle para poder minimizar inundaciones de calle. La Ciudad ha contratado Bergeron Land Development para realizar el trabajo. El proyecto incluye las áreas:

- Calle 17 desde Alton Road hasta West Avenue
- West Avenue desde Lincoln Road hasta Calle 17
- Calles 14 y 10 desde Alton Road hasta la bahía
- West Avenue desde Calle 5 hasta Calle 8
- Calle 6 desde Alton Road hasta West Avenue

Objetivo

Mejoras de Infraestructura:

- Instalación de una nueva sistema de drenaje de aguas pluviales, incluyendo la instalación de nuevas estaciones de bombeo en las Calles 6 y 17
- Nuevas estaciones de bombeo ya están en servicio en las Calles 10 y 14
- Aumentar secciones del sistema existente de drenaje de aguas pluviales
- Instalación de una nueva sistema de alcantarillado sanitario
- Instalación de nuevas tuberías y servicios de agua potable

Mejoras Viales:


- Elevando la calle
- Construcción de aceras, bordes y cunetas
- Instalación de nuevas letreros y de franjas en la carretera
- Mejoramientos de iluminación y señalización
- Nivelando varios caminos de entradas para empatarlas con la carretera

Se mantendrá acceso a los propiedades durante este trabajo. El estacionamiento en la calle se tendrá de eliminar temporalmente durante las obras.


Programación de la Construcción

La construcción de la primera fase se debe finalizar para el fin de 2015. Estas fechas pueden cambiar según las condiciones del tiempo y otras condiciones imprevistas.

Para solicitar este material en formato alternativo, intérprete de lenguaje de señas (5 días de aviso previo), información de acceso para personas con discapacidades, y/o cualquier ajuste para revisar documentos o participar en acontecimientos patrocinados por la ciudad, llame al 305.604.2489 y seleccione 2 para Español, luego la opción 6; usuarios de teléfonos de texto (TTY) pueden llamar a través del 711 (Servicio de retransmisión de la Florida).

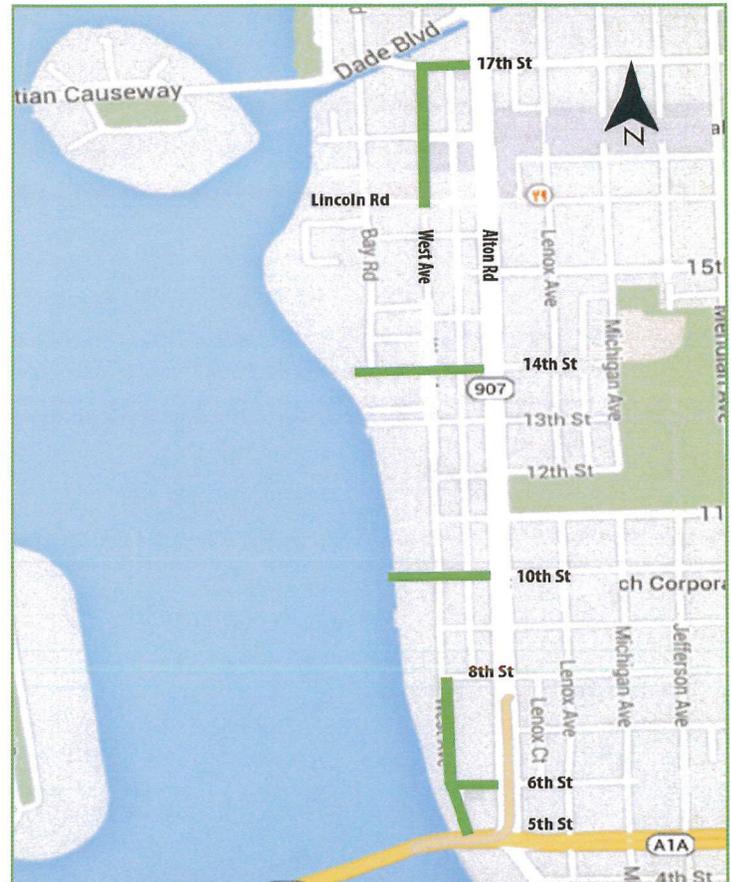

MAPA/SECCIÓN TÍPICA DEL PROYECTO

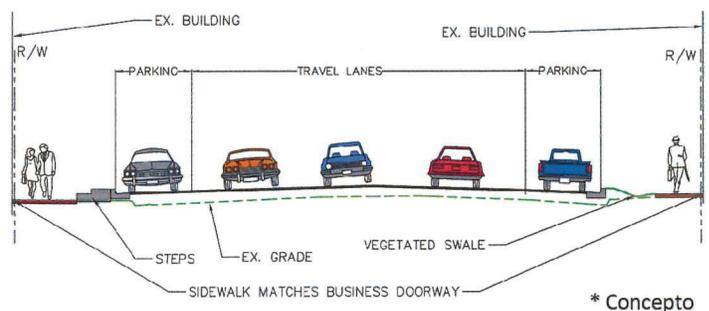

* Concepto

Comuníquese

Para obtener más información, comuníquese con:
Heather M. Leslie, Especialista de Información Pública
P: 305.905.5876 CE: heather@hmlpublicoutreach.com

UPDATE

PlannedProgress

MIAMI BEACH

West Avenue Neighborhood Improvement Project Phase I

Work begins Wednesday, March 11, 2015

Project Overview

The City of Miami Beach Public Works Department is constructing the West Avenue Neighborhood Improvement Project to install pump stations and raise the elevation of the roadway and sidewalk to minimize street flooding. The City has contracted Bergeron Land Development to perform the work.

Work Zone and Tasks

Construction is scheduled to begin on Wednesday, March 11 in the following areas:

- 17 Street between Dade Boulevard and Alton Road
- West side of West Avenue between Lincoln Road and 17 Street


Once the work zone is established, the contractor will begin excavating the roadway for underground drainage, sewer, water main and pump station work.

What to Expect

The contractor will close 17 Street between Dade Boulevard and West Avenue. Motorists will be detoured to use Dade Boulevard to get around the work. One eastbound and one westbound travel lane will remain open for local traffic only along 17 Street between West Avenue and Alton Road.

One northbound and one southbound travel lane will remain open for local traffic only on the east side of West Avenue between Lincoln Road and 17 Street.

Access to businesses and driveways will be maintained at all times. On-street parking along West Avenue will be temporarily eliminated during the work. This work phase is anticipated to last about three months. Allow yourself extra time to travel through this area. Please note this schedule may change due to weather or unforeseen circumstances.

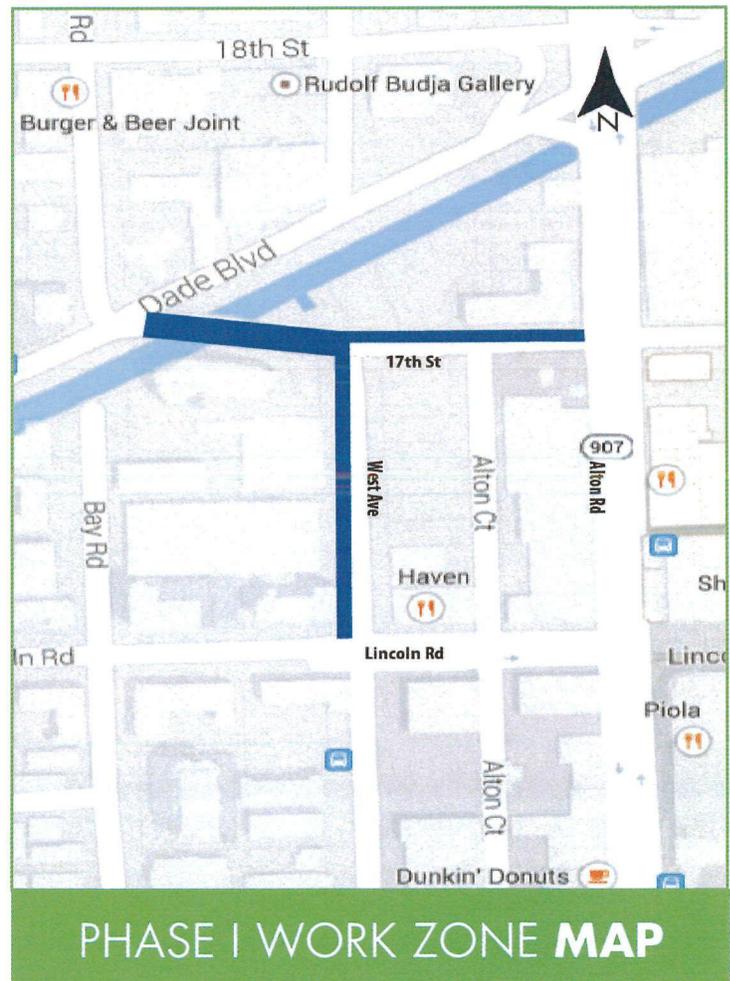

Communication


For more information, please contact:

Heather M. Leslie, public information liaison
P: 305.905.5876
E: Heather@hmlpublicoutreach.com

To request this material in alternate format, sign language interpreter (five-day notice required), information on access for persons with disabilities, and/or any accommodation to review any document or participate in any city-sponsored proceedings, call 305.604.2489 and select 1 for English or 2 for Spanish, then option 6; TTY users may call via 711 (Florida Relay Service).




Phase II
"Bridge Closure"

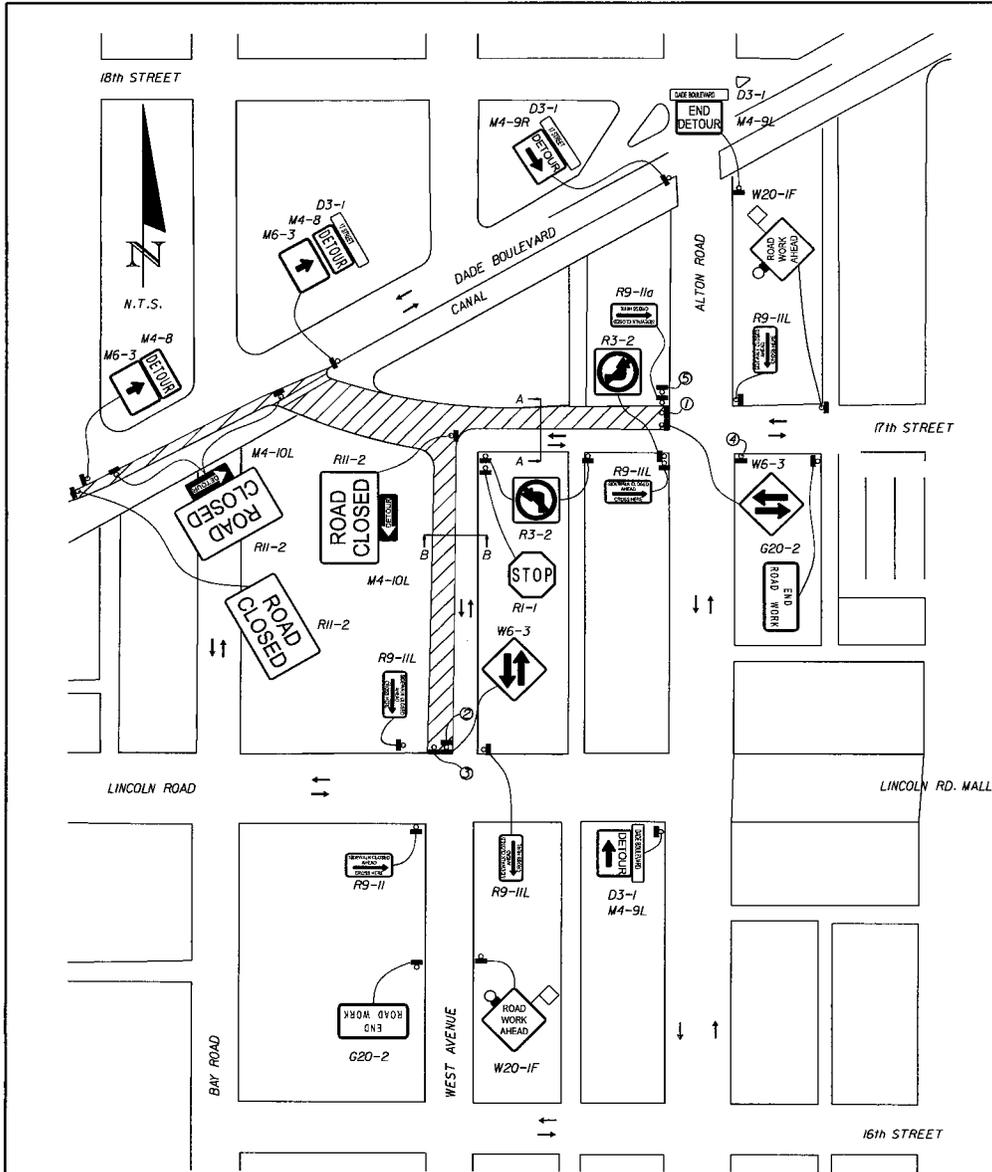


PHASE II


1. MAINTAIN TWO 11' LANES ON 17th STREET BETWEEN DADE BOULEVARD AND ALTON ROAD. ONE LANE FOR THE EASTBOUND TRAFFIC AND THE OTHER FOR THE WESTBOUND TRAFFIC.
2. MAINTAIN TWO 10' LANES ON WEST AVENUE BETWEEN LINCOLN ROAD AND 17th STREET. ONE LANE FOR THE NORTHBOUND TRAFFIC AND THE OTHER FOR THE SOUTHBOUND TRAFFIC.
3. MAINTAIN A 1' SEPARATION BETWEEN THE EASTBOUND AND WESTBOUND TRAVEL LANES ON 17th STREET AND ON WEST AVENUE. PLACE CHANNELIZING DEVICES SPACED ACCORDING TO INDEX 600 IN THE SPACE BETWEEN THE TRAVEL LANES.
4. SHIELD THE EXCAVATION ON WEST AVENUE AND ON 17th STREET WITH TEMPORARY BARRIER WALL PLACED ACCORDING TO INDEX 415.
5. MAINTAIN THE PEDESTRIAN CROSSING ON 17th STREET DADE BOULEVARD (MINIMUM 6' WIDTH). USE LONGITUDINAL CHANNELIZING DEVICES (LCD) AND TEMPORARY PAINT TO DELINEATE THE PEDESTRIAN CROSSING.
6. COVER OR OTHERWISE RENDER TEMPORARILY INOPERATIVE THE TRAFFIC SIGNAL AT WEST AVENUE AND 17th STREET. MODIFY THE TRAFFIC SIGNAL AT 17th STREET AND ALTON ROAD TO TEMPORARILY DISCONTINUE THE LEFT-TURN SIGNAL FOR EASTBOUND TRAFFIC.

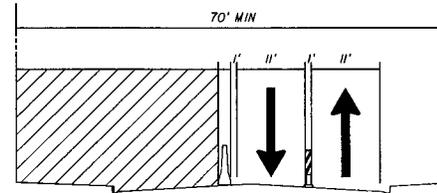

A-A

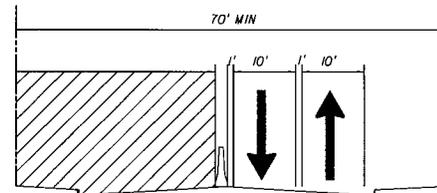

B-B

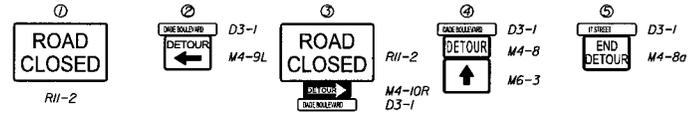

WORK ZONE / AREA CLOSED TO TRAFFIC

DIRECTION OF TRAFFIC

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION

CARLOS M. MAZORRA, P.E.
 P.E. LICENSE NUMBER 42653
 R.J. BEHAR & COMPANY, INC.
 6861 SW 196 AVENUE, SUITE 302
 PEMBROKE PINES, FLORIDA 33332
 CERTIFICATE OF AUTHORIZATION 00008365

CITY OF MIAMI BEACH		
ROAD	COUNTY	FINANCIAL PROJECT ID
17 ST	MIAMI-DADE	

TRAFFIC CONTROL PLAN
 PHASE II

SHEET NO.
 TCP-7